

THE MOST

ADVANCED MORTAR

The true multipurpose thinset, medium bed, non-sag, levelling/repair mortar with an accelerated hardness development



Okalift
SuperChange



**New premium
thinset/medium
bed mortar
with accelerated
curing**

www.kiesel.com




Servoflex 5 royal

True multipurpose thinset, medium bed, non-sag, levelling/repair mortar with an accelerated hardness development



Okalift
SuperChange

- For wall and floor installations, commercial and residential
- For interior, exterior and submersible applications
- Dust reduced, efflorescence free, aluminate cement based
- Excellent mortar for uncoupling membranes
- Fully walkable and ready to grout after 4 hours > absorbent substrates,
- 6 hrs > non-absorbent and uncoupling membranes
- Extended working time**
- Can be exposed to rain after 4-6 hours*
- Extended coverage is approximately +30% more than standard mortar
- Continued Mortar Consistency Technology
- Clip system friendly***
- LEED, recycle content

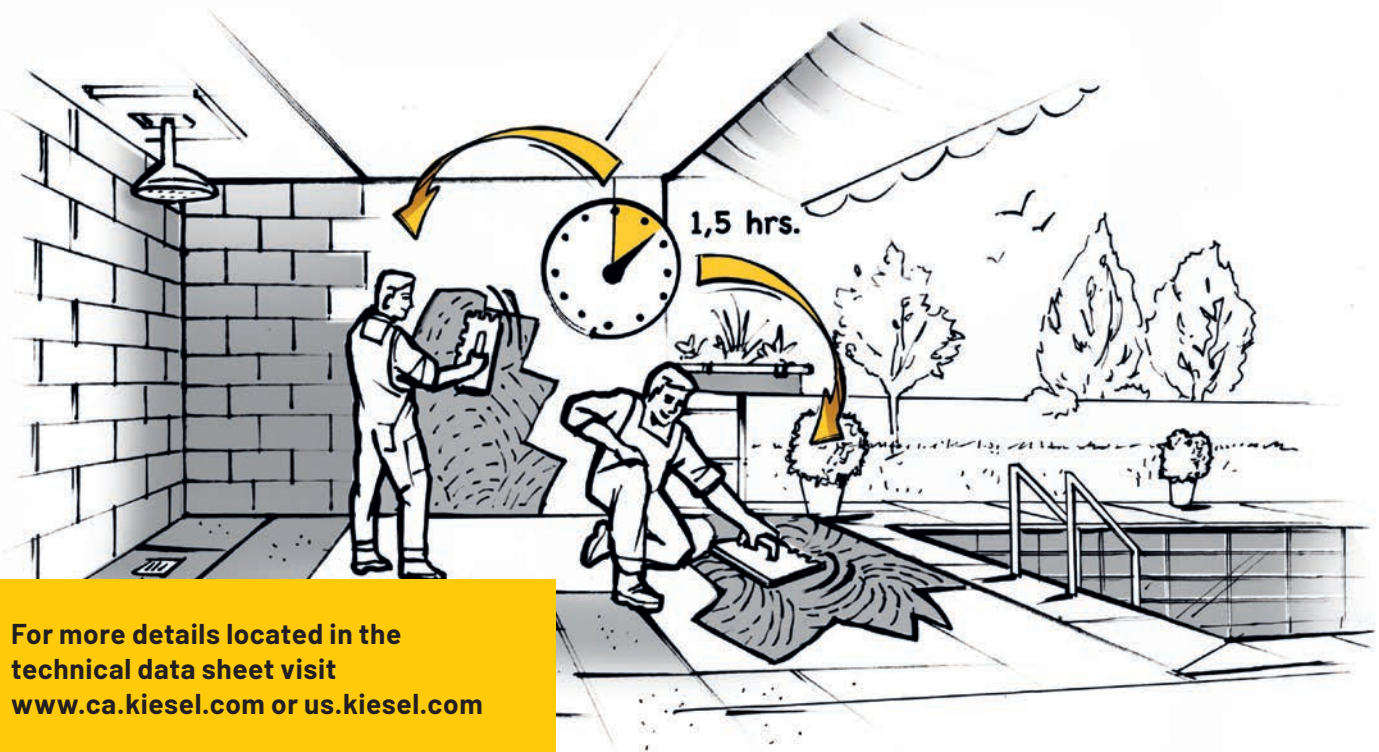

For more details located in the technical data sheet visit www.ca.kiesel.com or us.kiesel.com

SPECIFICATIONS

Color	Silver-gray
Application	Interior, exterior** and submerged environment**, especially on floors
Fully loadable*	After 12 hours
Thickness of the application	Max. ¾" (20 mm)
Temperature tolerance	-4 °F to 212 °F (-20 °C to +100 °C)
Water demand	Wall consistency: 3.25 liters per 12.5 kg / 3.43 US gal. per 27.5 lbs Floor consistency: 4.75 liters per 12.5 kg / 1.25 US gal. per 27.5 lbs
Slake time	Approx. 5 minutes (re-mix)
Pot life*	Approx. 1.5 hrs, water ratio dependable
Walkable* / ready for grouting*	After approx. 4-6 hours
Ready for exposure to rain*	After approx. 4-6 hours
GISCODE	ZP 1 – low in chrome TRGS 613
EMICODE	EC 1 ^{Plus}
Compliance	C2 FTE-S1 / ANSI pending
Recycle content	Yes
VOC	0.0 g/L
Storage	Approx. 12 months in a dry area, unopened packaging

* At 68 °F (+20 °C) and 65 % relative humidity. Higher temperatures and low humidity decrease, lower temperatures and high humidity increase this value respectively.

** Up to 2.5 hours bucket time with 20-30 minutes open time. *** At approx. 5.9 liters per 12.5 kg / 1.55 US gal. per 27.5 lbs. water ratio.

COVERAGE

Square notched trowel ¼" x ¼" x ¼"	Approx. 94 ft. per 12.5 kg/ 27.5 lbs bag
Square notched trowel ½" x ½" x ½"	Approx. 47 ft. per 12.5 kg/ 27.5 lbs bag

Coverage is approximate and is given for estimating purposes only. It may vary according to substrate conditions and other factors.

Packaging

72 x 12.5 kg / 27.5 lbs paper bags
Item No. 13155

VISIT US:



US.KIESEL.COM



CA.KIESEL.COM

**Kiesel Bauchemie
GmbH u. Co. KG**

Wolf-Hirth-Strasse 2
73730 Esslingen
Germany
Tel. +49 711 93134-0
Fax +49 711 93134-140
kiesel@kiesel.com

Technical Department
of North America
Toll-Free: 1.888.KIESEL1(5437351)
info.canada@kiesel.com
info.usa@kiesel.com

